


# 16" GATE VALVE ASSEMBLY WITH 6" BYPASS

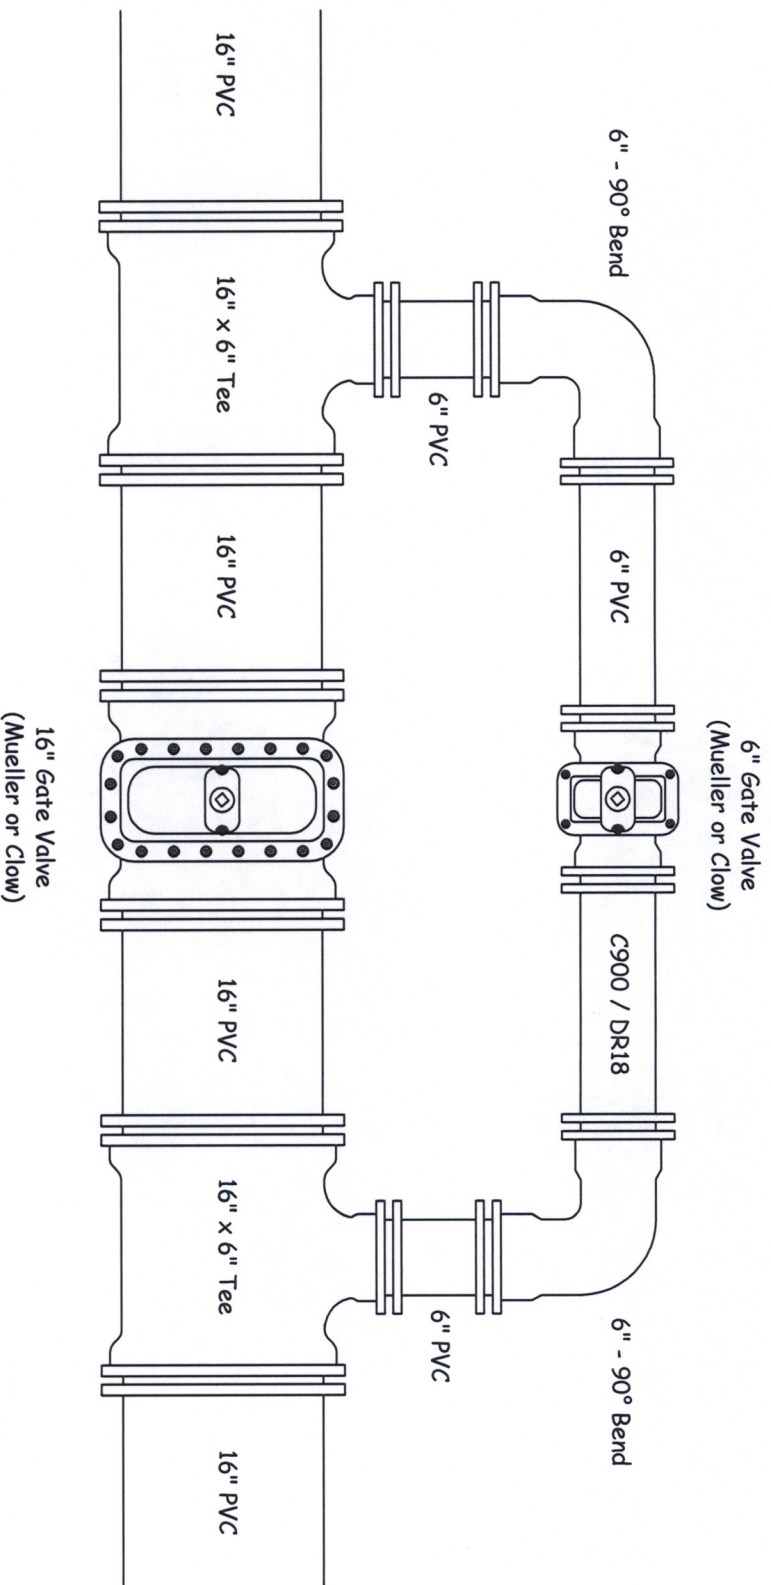

Ductile Iron Fittings - Compact 153  
Mega Lugs.

Valve Stacks - 6" PVC with cast iron  
top and bottom. (No Cast Iron Screw  
Stacks)

Poly Wrap on all cast fittings.

Thrust blocks required per Engineer.

16" GATE VALVE ASSEMBLY WITH 6"  
BYPASS



CITY OF GREENVILLE  
PUBLIC WORKS DEPARTMENT

DRAWN: K. Colbert	SCALE: NTS	DRAWING NO.
DATE DRAWN: 8-13-07	DATE REVISED: 8-15-07	26007