


PARKING AREA REQUIREMENTS


6" COMPACTED ROCK / 2" HMAC OR
4" CONCRETE / 2" SAND CUSHION OR
APPROVED EQUAL BY THE DIRECTOR
OF PUBLIC WORKS.

NOTE: CONCRETE PAVING TO HAVE
#4 BARS ON 2'-0" CENTERS BOTH
WAYS.

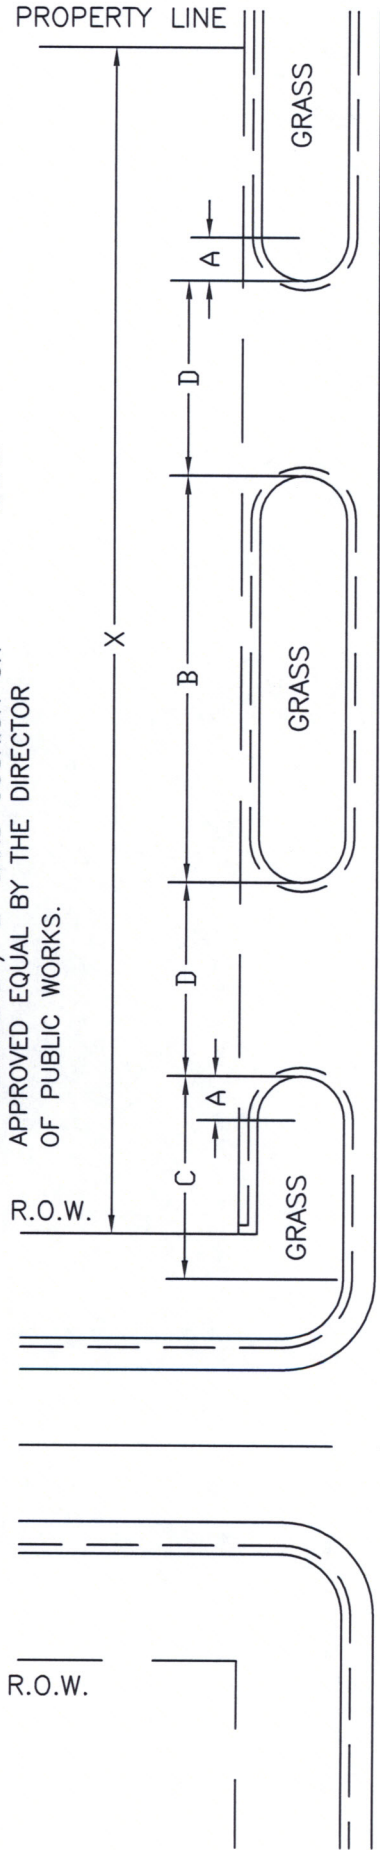

CENTERLINE OF STREET

CENTERLINE OF STREET

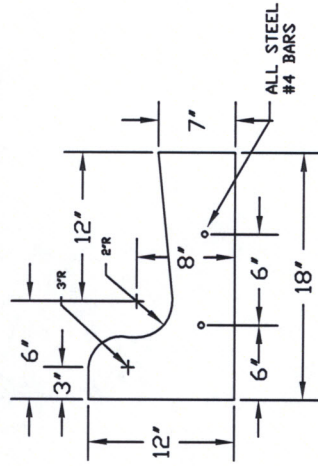

PARKING LOT
CURB & GUTTER
DETAIL

NOTE:
CONCRETE SHALL HAVE A TWENTY-EIGHT (28)
DAY COMPRESSIVE STRENGTH OF 3500 PSI.

X	A	B	C	D
FRONTAGE	CURB RETURN RADIUS	ISLAND WIDTH	CORNER CLEARANCE	DRIVEWAY WIDTH
	DESIRABLE	MINIMUM	DESIRABLE	MIN. DESIRABLE MAX.
			NO. OF DRIVEWAYS	
			MAXIMUM	

TYPICAL ACCESS LAYOUT

CITY OF GREENVILLE
PUBLIC WORKS DEPARTMENT

DRAWN: K. Colbert	SCALE: NTS
DATE DRAWN: 2-12-01	DATE REVISED: 6-27-11
DRAWING NO. 25011	

FOR SPACING, NUMBER OF DRIVES AND MINIMUM SIZES REFER TO THE CITY OF GREENVILLE STANDARD DESIGN MANUAL